


Water **Treatment** Pressure Vessels






www.Technical-24.com Booking@uaetechnical24.com +971 600-566447

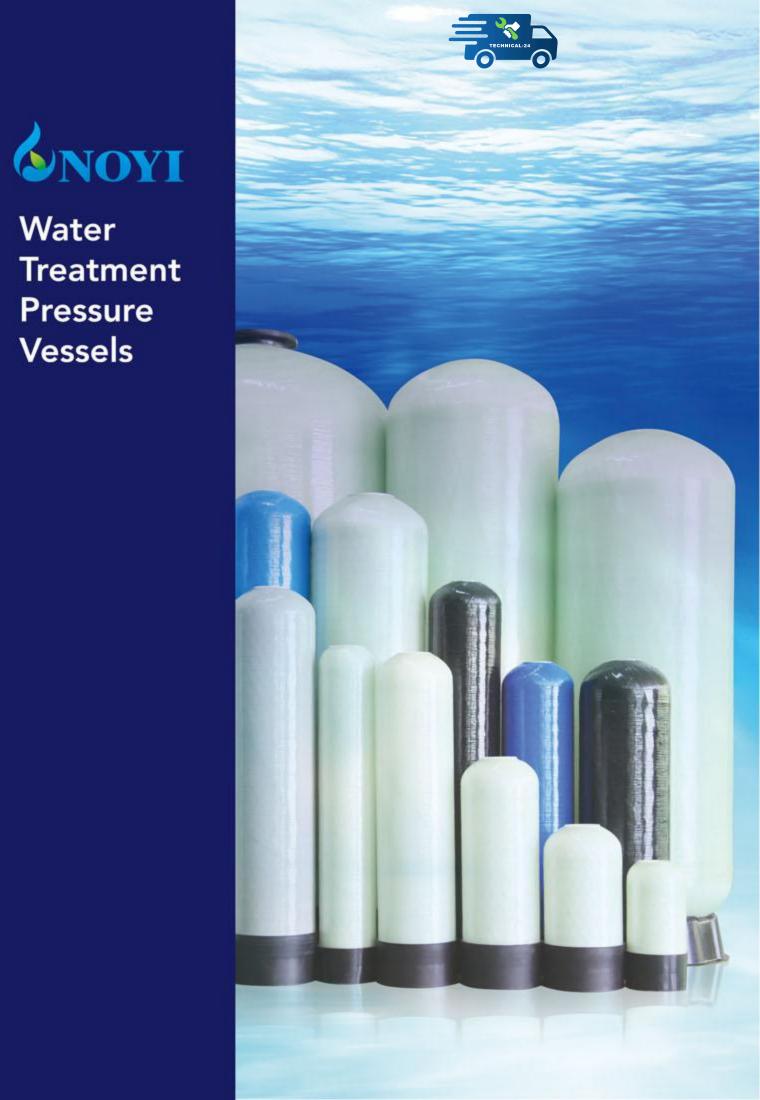



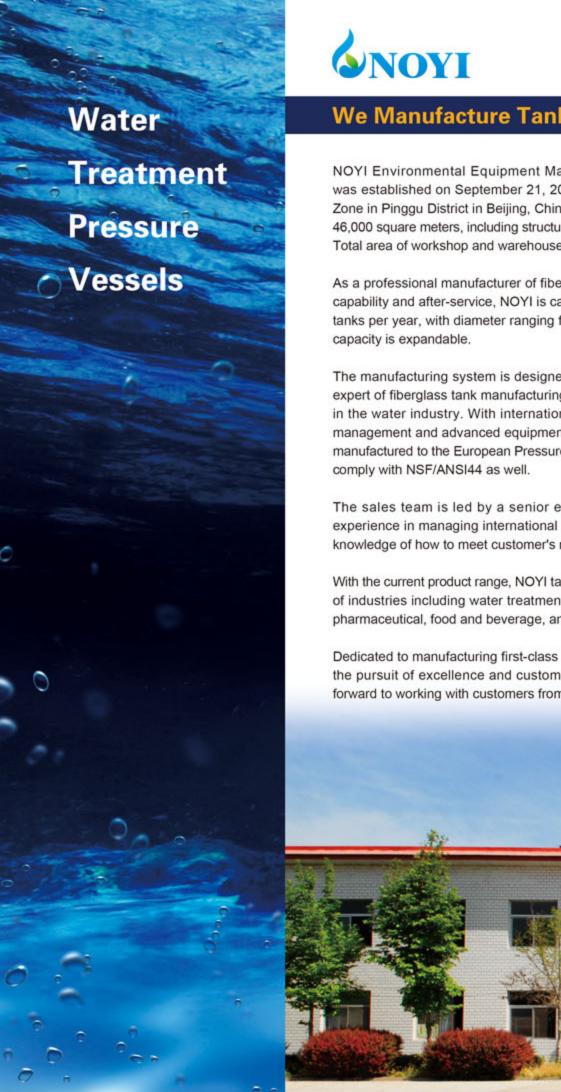

#### We Manufacture Tanks ONLY

NOYI Environmental Equipment Manufacturing (Beijing) Co. Ltd. was established on September 21, 2011, located in Yukou Industrial Zone in Pinggu District in Beijing, China. The factory covers an area of 46,000 square meters, including structure area of 30,000 square meters. Total area of workshop and warehouse is 23,000 square meters.

As a professional manufacturer of fiberglass pressure tanks with R&D capability and after-service, NOYI is capable of manufacturing 500,000 tanks per year, with diameter ranging from 6 to 63 inch. A million tanks

The manufacturing system is designed and managed by a European expert of fiberglass tank manufacturing with over 30 years' experience in the water industry. With international standards of manufacturing management and advanced equipment, NOYI tanks are designed and manufactured to the European Pressure Equipment Directive (PED) and

The sales team is led by a senior expert who has over 20 years' experience in managing international sales and marketing as well as knowledge of how to meet customer's requests and expectations.

With the current product range, NOYI tanks can be used in a wide variety of industries including water treatment, petrol, chemicals, electronics, pharmaceutical, food and beverage, and brewing.

#### Applications

Filtration Softening Storage Ion exchange

#### **Operating Specifications**

Maximum operating pressure: 150psi/10bar Maximum operating temperature: 120°F/50°C

#### Materials Used

All construction materials that are in contact with water are food grade materials

Inner shell: seamless polyethylene

Outer shell: consists of premium fiberglass embedded in epoxy resin

Threaded inlets from glass reinforced thermoplastic material



#### **Advanced Engineering and Manufacturing**



#### Processes Used for Manufacturing

CNC controlled blow molding
CNC controlled injection molding
CNC controlled filament winding
Rotational molding
Die casting



#### Quality Assurance

Designed to PED (EN 13923)

Random selected vessels are permanently subjected to leak test to verify its performance
Random selected vessels are permanently subjected to burst test to verify design parameters

Random selected vessels are permanently subjected to fatigue test to verify design parameters



#### Warranty

6"-13"residential vessels 10years 14"-63"commercial and industrial vessels 5



### Why Customers Specify NOYI

High quality products with certification to above quality
Assurance standards
Trusted performance
Unparalleled service
Rapid delivery

#### NSF Product 6"--63"




#### Listing Category Search Page | NSF International

6×13, 2.5" -8NPSM 6×17, 2.5" -8NPSM 6×18, 2.5" -8NPSM 6×29, 2.5" -8NPSM 6×35, 2.5" -8NPSM 7×13, 2.5" -8NPSM 7×17, 2.5" -8NPSM 7×19, 2.5" -8NPSM 7×30, 2.5" -8NPSM 7×35, 2.5" -8NPSM 7×40, 2.5" -8NPSM 8×13, 2.5" -8NPSM 8×13, 2.5" -8NPSM 8×17, 2.5" -8NPSM 8×24, 2.5" -8NPSM 8×24, 2.5" -8NPSM 8×24, 2.5" -8NPSM 8×24, 2.5" -8NPSM 8×30, 2.5" -8NPSM 8×30, 2.5" -8NPSM 8×40, 2.5" -8NPSM 8×40, 2.5" -8NPSM 8×40, 2.5" -8NPSM 8×41, 2.5" -8NPSM	9×24, 2.5" -8NPSM 9×30, 2.5" -8NPSM 9×35, 2.5" -8NPSM 9×40, 2.5" -8NPSM 9×42, 2.5" -8NPSM 9×48, 2.5" -8NPSM 10×13, 2.5" -8NPSM 10×16, 2.5" -8NPSM 10×17, 2.5" -8NPSM 10×19, 2.5" -8NPSM 10×22, 2.5" -8NPSM 10×24, 2.5" -8NPSM 10×30, 2.5" -8NPSM 10×30, 2.5" -8NPSM 10×47, 2.6" -8NPSM 10×47, 2.6" -8NPSM 10×47, 2.6" -8NPSM 10×47, 2.6" -8NPSM 12×42, 2.5" -8NPSM 12×42, 2.5" -8NPSM 12×42, 2.5" -8NPSM	13×44, 2.5" -8NPSM 13×44, 4" -8UN 13×54, 2.5" -8NPSM 13×54, 4" -8UN 14×47, 2.5" -8NPSM 14×47, 4" -8UN 14×52, 2.5" -8NPSM 14×52, 4" -8UN 14×65, 2.5" -8NPSM 14×65, 4" -8UN 16×28, 2.5" -8NPSM 16×28, 4" -8UN 16×52, 2.5" -8NPSM 16×52, 2.5" -8NPSM 16×52, 2.5" x 2.5" -8NPSM 16×52, 2.5" x 2.5" -8NPSM 16×65, 2.5" x 2.5" -8NPSM 16×65, 2.5" x 2.5" -8NPSM 16×65, 2.5" x 2.5" -8NPSM 16×65, 4" -8UN 16×65, 4" -8UN 16×65, 4" -8UN 16×65, 4" -8UN 16×65, 4" -8UN 16×65, 4" -8UN 18×36, 4" -8UN	18×65, 4" -8UN 18×65, 4"x 4" -8UN 21×36, 4" -8UN 21×53, 4" -8UN 21×62, 4" -8UN 21×62, 4"x 4" -8UN 24×65, 4"x 4" -8UN 24×65, 4"x 4" -8UN 24×72, 4" -8UN 24×72, 4" -8UN 30×72, 4"x 4" -8UN 30×72, 4"x 4" -8UN 36×57, 6" FLG 36×57, 6" FLG 36×72 4"x4" -8UN 36×72 4"x4" -8UN 36×72 4"x4" -8UN 36×72 4"x4" -8UN 36×72 6" FLG 42×63, 6" x 6" FLG 42×63, 6" x 6" FLG 42×63, 6" x 6" FLG 42×72, 6" x 6" FLG 42×72, 6" x 6" FLG 43×67, 6" x 6" FLG 63×86, 6" x 6" FLG
---	--	---	---


## **Product Specifications**

NO.	Cina/Inches)	Oper	ning	Volu	ıme	Dimens		sions	
110.	Size(Inches)	Тор	Bottom	Liter	Gallon	A(mm)	B(mm)	C(mm)	D(mm)
1	6 x 13	2.5"	/	4.6	1.2	337	Ф165		Ф155
2	6 x 17	2.5"	/	6.6	1.7	435	Ф165		Ф155
3	6 x 35	2.5"	/	13.7	3.6	918	Ф165		Ф155
4	7 x 13	2.5"	/	6.3	1.7	335	Ф197		Ф182
5	7 x 17	2.5"	/	8.6	2.3	438	Ф197		Ф182
6	7 x 35	2.5"	/	20.1	5.3	895	Ф197		Ф182
7	7 x 44	2.5"	/	25.6	6.8	1125	Ф197		Ф182
8	8 x 13	2.5"	/	8.5	2.2	335	Ф216		Ф210
9	8 x 17	2.5"	/	10.9	2.9	435	Ф216		Ф210
10	8 x 35	2.5"	/	25	6.6	890	Ф216		Ф210
11	8 x 44	2.5"	/	32.1	8.5	1115	Ф216		Ф210
12	9 x 17	2.5"	/	13.8	3.7	440	Ф240		Ф232
13	9 x 35	2.5"	/	32.1	8.5	900	Ф240		Ф232
14	9 x 42	2.5"	/	38.4	10.2	1075	Ф240		Ф232
15	9 x 48	2.5"	/	44.4	11.7	1225	Ф240		Ф232
16	10 x 17	2.5"	/	16.7	4.4	440	Ф269		Ф260
17	10 x 35	2.5"	/	39.4	10.4	890	Ф269		Ф260
18	10 x 44	2.5"	/	51.2	13.5	1130	Ф269		Ф260
19	10 x 54	2.5"	/	63.3	16.7	1385	Ф269		Ф260
20	12 x 48	2.5"	/	89	23.5	1230	Ф318		Ф310
21	12 x 52	2.5"	/	97	25.7	1330	Ф318		Ф310
22	13 x 44	2.5"	/	86.8	23.0	1125	Ф343		Ф336
23	13 x 54	2.5"	/	105.3	27.9	1380	Ф343		Ф336
24	13 x 54	4"-8UN	/	105.3	27.9	1380	Ф343		Ф336
25	14 x 52	2.5"	/	115.7	30.6	1340	Ф369		Ф362
26	14 x 52	4"-8UN	/	115.7	30.6	1340	Ф369		Ф362
27	14 x 65	2.5"	/	148.5	39.3	1655	Ф369		Ф362
28	14 x 65	4"-8UN	/	148.5	39.3	1655	Ф369		Ф362
29	14 x 65	4"-8UN	4"-8UN	148.5	39.3	1880		225	Ф362
30	16 x 52	2.5"	1	153	40.5	1330	Ф422		Ф412
31	16 x 52	4"-8UN	/	153	40.5	1330	Ф422		Ф412
32	16 x 65	2.5"	/	192.1	50.8	1650	Φ422		Ф412
33	16 x 65	4"-8UN	/	192.1	50.8	1650	Ф422		Ф412
34	16 x 65	4"-8UN	4"-8UN	192.1	50.8	1910		225	Ф412


NO.	Size(Inches)	Opening		Vol	Volume		Dimensions			
		Тор	Bottom	Liter	Gallon	A(mm)	B(mm)	C(mm)	D(mm)	
35	18 x 36	4"-8UN	/	141	37.3	940	Ф451		Ф461	
36	18 x 53	4"-8UN	/	216.5	57.3	1370	Ф451		Ф461	
37	18 x 65	4"-8UN	/	268	70.9	1670	Ф451		Ф461	
38	18 x 65	4"-8UN	4"-8UN	268	70.9	1970		330	Ф461	
39	21 x 36	4"-8UN	1	180	47.6	960	Ф532		Ф543	
40	21 x 53	4"-8UN	1	278	73.5	1390	Ф532		Ф543	
41	21 x 62	4"-8UN	1	341	90.2	1620	Ф532		Ф543	
42	21 x 62	4"-8UN	4"-8UN	341	90.2	1890	- 4	330	Ф543	
43	24 x 65	4"-8UN	/	419	110.8	1730	Ф616		Ф615	
44	24 x 65	4"-8UN	4"-8UN	419	110.8	2010		330	Ф615	
45	24 x 72	4"-8UN	/	490	129.6	1900	Ф616		Ф615	
46	24 x 72	4"-8UN	4"-8UN	490	129.6	2180		330	Ф615	
47	30 x 72	4"-8UN	/	735	194.4	1870	Ф750		Ф765	
48	30 x 72	4"-8UN	4"-8UN	735	194.4	2170		330	Ф765	
49	30 x 72	6"-FLG	6"-FLG	735	194.4	2260		270	Ф765	
50	36 x 72	4"-8UN	/	1031	272.8	1960	Ф910		Ф920	
51	36 x 72	4"-8UN	4"-8UN	1031	272.8	2200		355	Ф920	
52	36 x 72	6"-FLG	6"-FLG	1031	272.8	2280		295	Ф920	
53	42 x 72	6"-FLG	6"-FLG	1461	386.5	2300		303	Ф1067	
54	48 x 72	6"-FLG	6"-FLG	1890	500.0	2250		300	Ф1215	
55	63 x 86	6"-FLG	6"-FLG	3000	792.5	2475		285	Ф1620	









12 "-16 " top opening



18 "-36 " top opening



14 "-36 " top and bottom opening



36 "-63 " top and bottom opening







# 20 Inch Triple Jumbo Vietnam

**Description** 

# Description

#### 20 Inch Triple Jumbo Vietnam

Specifications:

Three stages 20"Jumbo Filtration with Pressure Gauge

1" BSP threaded ports, ideal for a high flow rate.

Food grade plastics, BPA free .

20" Jumbo Filter Housings will fit any standard sized 20" Jumbo cartridges. Pressure release valve allows you to bleed out air which may be trapped inside the filter housing before and after changing filters. This allows the filter housing bowls to be unscrewed easier.

Made In Vietnam.

